

96635793 VIC1 24L105-740 NR CL2 N8M R9006



Victor

A small size LED road and street luminaire, in a modern and timeless design. 24 LEDs driven at 1050mA with Narrow Road optic. Fixed output LED driver. Class II electrical, IP66. Body in aluminium, powder coated White aluminium RAL9006. Enclosure: toughened glass. Luminaire to be suspended using brackets ($\varnothing 27G$), post top, or wall mounted. Tool-free electrical connection via 2 x 2.5 mm² terminal block. Pre-wired with 8m H07-RNF cable. Complete with 4000K LED

Dimensions: $\varnothing 363$ x 277 mm


Luminaire input power: 80 W

Weight: 4.93 kg

Scx: 0.084 m²



TLG_VCTR_F_65PDB.jpg

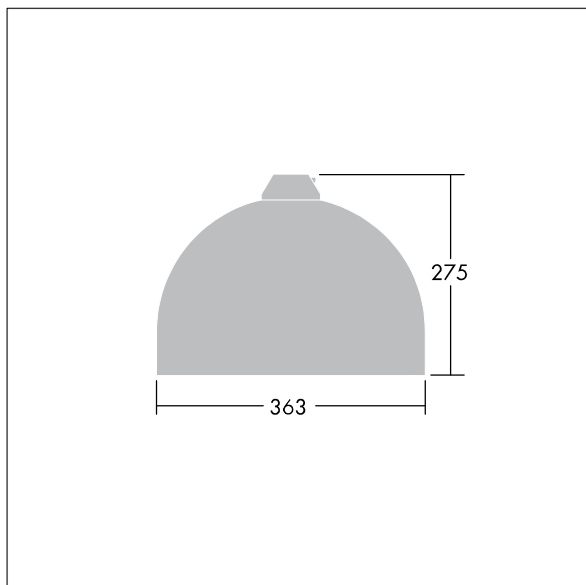

TLG_VCTR_M_SWLD1.wmf

This product contains a light source of energy efficiency class D.

Victor

96635793 VIC1 24L105-740 NR CL2 N8M R9006

THORN