

# Punch

THORN

E7023063 / 96636015 PUNCH 3 LV MSP 5500-830 L12 HF

UK CA	IP20	IK03	⏚	CE			650°C	T <sub>a</sub> 0 +25	
----------	------	------	---	----	---	---	-------	-------------------------	--

## Punch

A slim, suspended luminaire with direct/indirect distribution. fixed output control gear Electronic,. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Louvre: glossy aluminium,. Class I electrical, IP20, Impact strength: IK03. Electrical connection via piano key terminal block. Complete with 3000K LED.

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1301 x 162 x 56 mm

Luminaire input power: 39 W


Luminaire luminous flux: 5304 lm

Luminaire efficacy: 136 lm/W

Weight: 3.5 kg



TLG\_PNCH\_F\_LOUVRE\_recessed\_on.jpg

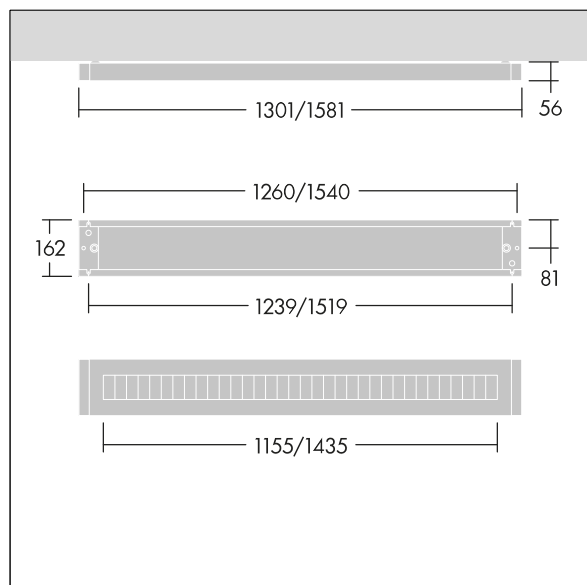

TLG\_PNC3\_M\_LV\_RESD.wmf

This product contains light sources of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Punch**

**E7023063 / 96636015 PUNCH 3 LV MSP 5500-830 L12 HF**

**THORN**