

Punch

96636026 PUNCH 3 LV MSC 6000-930 L15 HFIX

THORN

| | | | | | | | | | |
|----------|------|------|---|---|---|---|-------|-------------------------|--|
| UK CA | IP20 | IK03 |  |  |  |  | 650°C | T _a 0 +25 | |
|----------|------|------|---|---|---|---|-------|-------------------------|--|

Punch


A slim, surface mounted luminaire with direct distribution.
DALI dimmable Electronic,. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Louvre: glossy aluminium,. Class I electrical, IP20, Impact strength: IK03.
Electrical connection via piano key terminal block.
Complete with 3000K LED.

Can be used as a suspended direct only luminaire when combined with Y-Suspension connector and suspension kit (to be ordered separately 22171581 & 22171349).

Dimensions: 1581 x 162 x 56 mm
Luminaire input power: 44.2 W
Luminaire luminous flux: 5840 lm
Luminaire efficacy: 132 lm/W
Weight: 3.8 kg



TLG_PNCH_F_LOUVRE_surface_on.jpg

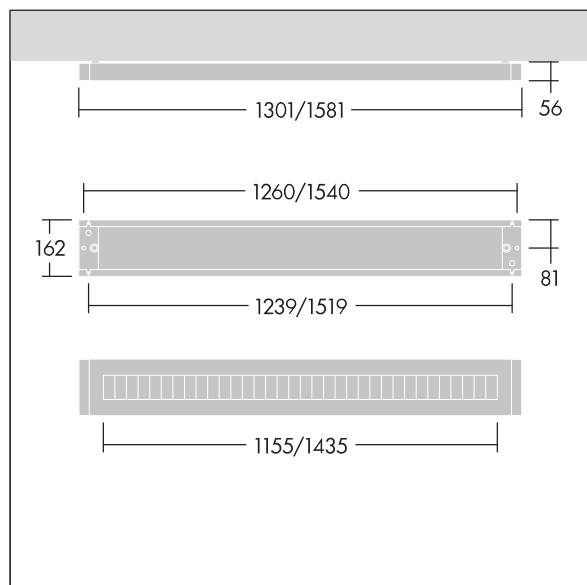

TLG_PNC3_M_LV_RESD.wmf

This product contains light sources of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Punch

96636026 PUNCH 3 LV MSC 6000-930 L15 HFIX

THORN