






# HiPak Gen4

THORN

E7218832 / 96636210 HIPAK G4 L LED30000-840 WB HF QC5

UK CA		IP65		IK08		CE			850°C	T <sub>a</sub> 50	
----------	---	------	---	------	---	----	---	---	-------	-------------------	--

## HiPak Gen4

An IP65 single point suspension LED high bay luminaire with wide beam optic. Electronic, fixed output control gear, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: die-cast aluminium. Lens/Diffuser: polycarbonate. Supplied with mounting hook. Equipped with 5 pole Quick Connect socket. Complete with 4000K LED.

ambient temperature: -30°C to +50°C

Dimensions: Ø380 x 170 mm

Luminaire input power: 170.6 W


Luminaire luminous flux: 30000 lm

Luminaire efficacy: 176 lm/W

Weight: 5.22 kg



TLG\_HIP4\_F\_NO\_STIR\_2.jpg

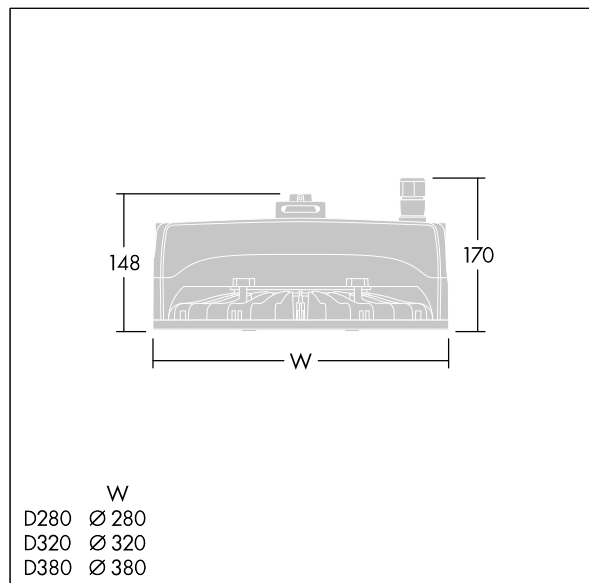

TLG\_HIP4\_M\_ALL.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# HiPak Gen4

E7218832 / 96636210 HIPAK G4 L LED30000-840 WB HF QC5

THORN