





	IP66			IK10					850°C	T _a -20 +55
-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	---------------------------

ForceLED

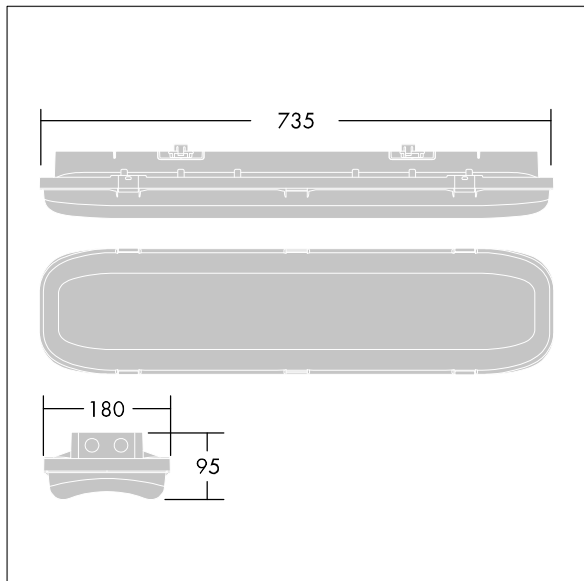
A compact IP66, dust and moisture proof LED luminaire.
Electronic, fixed output control gear. Class I electrical, IK10.
Canopy: fully recyclable aluminium painted white. Diffuser:
UV stabilised polycarbonate with linear prisms. Toggles:
stainless steel. For surface, BESA or suspended mounting.
Quick-fix brackets supplied for surface mounting. Mounting
kits for conduit, chain suspension and catenary suspension
are available as accessories. Complete with 4000K LED.

ambient temperature: -20°C to +55°C

Dimensions: 735 x 180 x 95 mm
Luminaire input power: 27.6 W
Luminaire luminous flux: 4000 lm
Luminaire efficacy: 145 lm/W
Weight: 3 kg



TLG_FORL_F_PDBUNLIT.jpg



TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.

ForceLED

E7218808 / 96636368 FORCELED 4000-840 HF

THORN