








E7218812 / 96636370 FORCELED 10000-840 HF

	IP66			IK10					850°C	T _a -20 +30	
---	------	---	---	------	---	---	---	---	-------	---------------------------	--

ForceLED

A compact IP66, dust and moisture proof LED luminaire.
Electronic, fixed output control gear. Class I electrical, IK10.
Canopy: fully recyclable aluminium painted white. Diffuser:
UV stabilised polycarbonate with linear prisms. Toggles:
stainless steel. For surface, BESA or suspended mounting.
Quick-fix brackets supplied for surface mounting. Mounting
kits for conduit, chain suspension and catenary suspension
are available as accessories. Complete with 4000K LED.

ambient temperature: -20°C to +30°C

Dimensions: 735 x 180 x 95 mm

Luminaire input power: 75.2 W


Luminaire luminous flux: 10000 lm

Luminaire efficacy: 133 lm/W

Weight: 3 kg



TLG_FORL_F_PDBUNLIT.jpg

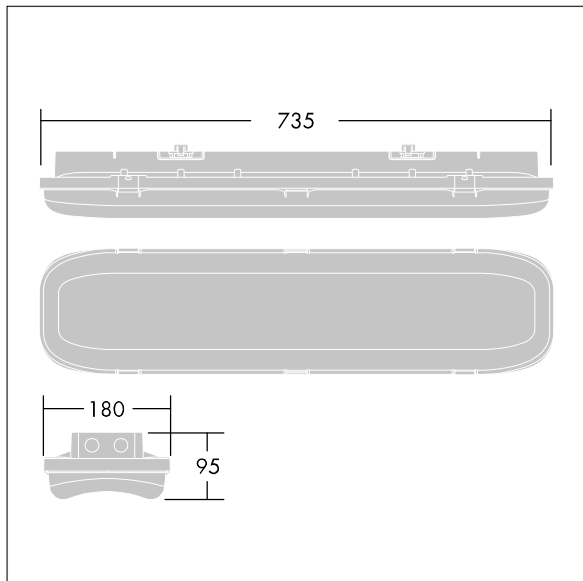

TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

ForceLED

E7218812 / 96636370 FORCELED 10000-840 HF

THORN