








| | | | | | | | | | | | |
|---|------|---|---|------|---|---|---|---|-------|---------------------------|--|
|  | IP66 |  |  | IK10 |  |  |  |  | 850°C | T _a -20 +55 | |
|---|------|---|---|------|---|---|---|---|-------|---------------------------|--|

ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, fixed output control gear. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with through wiring. Complete with 4000K LED.

ambient temperature: -20°C to +55°C

Dimensions: 735 x 180 x 95 mm
Luminaire input power: 27.6 W
Luminaire luminous flux: 4000 lm
Luminaire efficacy: 145 lm/W
Weight: 3.3 kg



TLG_FORL_F_PDBUNLIT.jpg

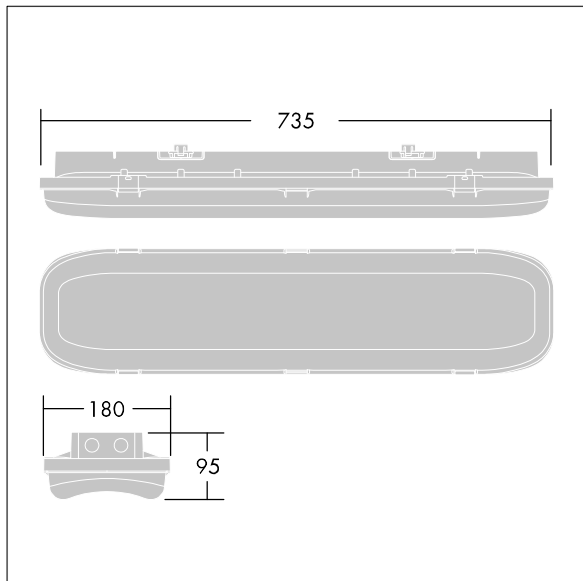

TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.