

Chalice 3

92989197 CHAL3 100 800-940 EHF RSB

IEC EN 60598-1 RG 1	UK CA			halogen	IK08		CE			850°C	T <sub>a</sub> 25	
---------------------	-------	--	--	---------	------	--	----	--	--	-------	-------------------	--


Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to mm and Ø100mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54\_IP20. Complete with 4000K LED

Dimensions: Ø119 x 95 mm  
Luminaire input power: 8.8 W  
Luminaire luminous flux: 810 lm  
Luminaire efficacy: 92 lm/W  
Weight: 0.5 kg



TLG\_CHAL3\_F\_100HP\_RSB\_2.jpg

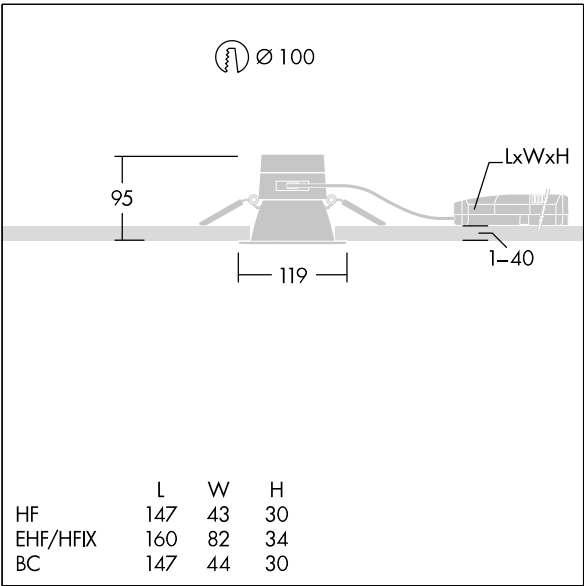

TLG\_CHAL3\_M\_EHF100H.wmf

This product contains a light source of energy efficiency class D.

## Chalice 3

92989197 CHAL3 100 800-940 EHF RSB

THORN