

# Chalice 3

THORN

92989223 CHAL3 150 3000-840 HFIX RMB

IEC EN 60598-1 RG 1	UK CA				halogen	IK09		CE				850°C	T <sub>a</sub> 25	
------------------------	----------	--	--	--	---------	------	--	----	--	--	--	-------	-------------------	--

## Chalice 3


A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in high glossy finish for improved glare control in office applications. Class II electrical, IP54\_IP20. Complete with 4000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø174 x 94 mm  
 Luminaire input power: 27.3 W  
 Luminaire luminous flux: 3343 lm  
 Luminaire efficacy: 122 lm/W  
 Weight: 0.69 kg



TLG\_CHAL3\_F\_150\_RMB\_IP54.jpg

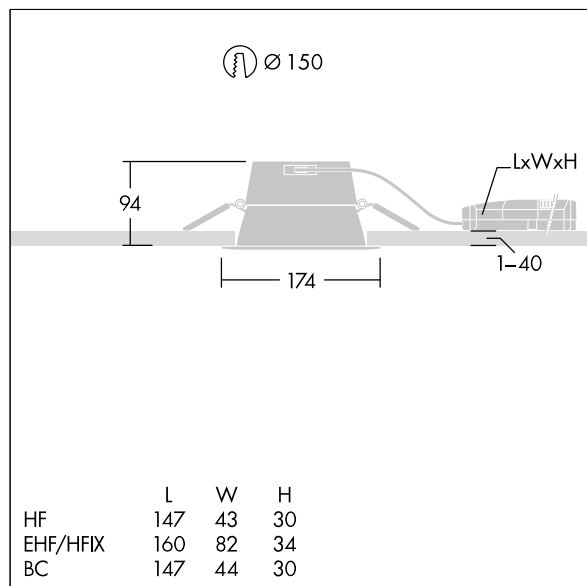

TLG\_CHAL3\_M\_EHF150.wmf

This product contains a light source of energy efficiency class B.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

## Chalice 3

92989223 CHAL3 150 3000-840 HFIX RMB

THORN