

## Chalice 3

92989227 CHAL3 150 1400-940 EHF RMB

|                        |          |  |  |  |      |  |  |  |  |       |                   |  |
|------------------------|----------|--|--|--|------|--|--|--|--|-------|-------------------|--|
| IEC EN 60598-1<br>RG 1 | UK<br>CA |  |  |  | IK09 |  |  |  |  | 850°C | T <sub>a</sub> 25 |  |
|------------------------|----------|--|--|--|------|--|--|--|--|-------|-------------------|--|


### Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in high glossy finish for improved glare control in office applications. Class II electrical, IP54\_IP20. Complete with 4000K LED

Dimensions: Ø174 x 94 mm  
 Luminaire input power: 13 W  
 Luminaire luminous flux: 1401 lm  
 Luminaire efficacy: 108 lm/W  
 Weight: 0.68 kg



TLG\_CHAL3\_F\_150\_RMB\_IP54.jpg

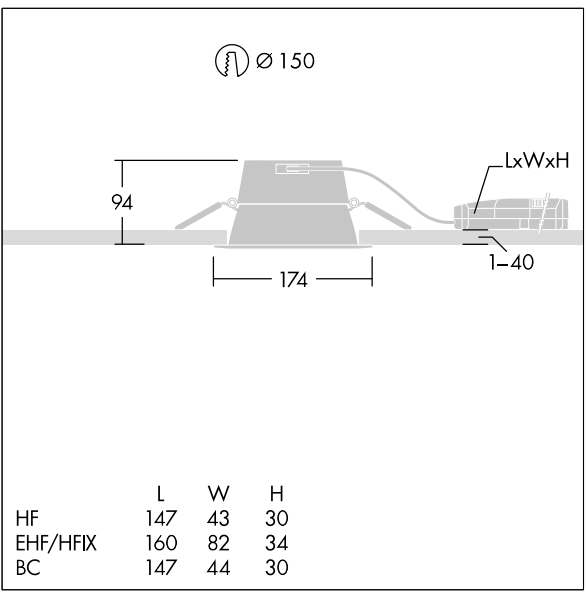

TLG\_CHAL3\_M\_EHF150.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

## Chalice 3

92989227 CHAL3 150 1400-940 EHF RMB

THORN