

Chalice 3

92989237 CHAL3 200 2000-840 HFIX RSB

IEC EN 60598-1 RG 1	UK CA				halogen	IK09		CE				850°C	T <sub>a</sub> 25	
---------------------	-------	--	--	--	---------	------	--	----	--	--	--	-------	-------------------	--


Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø200mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54\_IP20. Complete with 4000K LED

Dimensions: Ø223 x 96 mm  
Luminaire input power: 14.5 W  
Luminaire luminous flux: 1990 lm  
Luminaire efficacy: 137 lm/W  
Weight: 0.94 kg



TLG\_CHAL3\_F\_200\_RSB.jpg

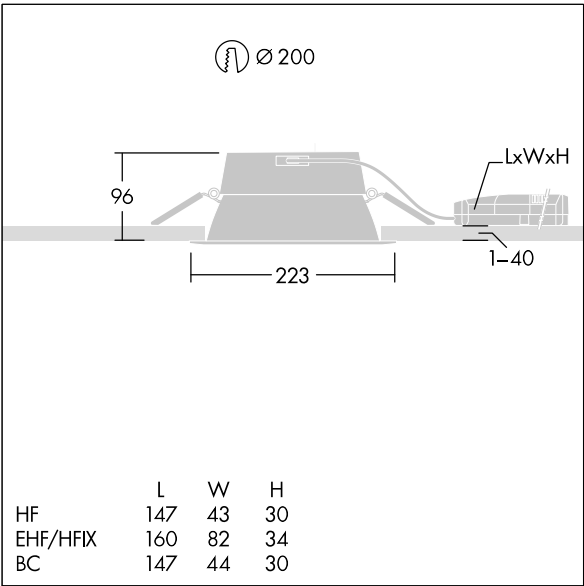

TLG\_CHAL3\_M\_EHF200.wmf

This product contains a light source of energy efficiency class B.

## Chalice 3

92989237 CHAL3 200 2000-840 HFIX RSB

THORN