

Chalice 3

92989243 CHAL3 150 3000-940 HFIX RMB

| | | | | | | | | | | | | |
|------------------------|----------|--|----------------|---------|------|--|----|--|--|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | IP20 ↑ IP54 | halogen | IK09 | | CE | | | 850°C | T _a 25 | |
|------------------------|----------|--|----------------|---------|------|--|----|--|--|-------|-------------------|--|

Chalice 3


A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in high glossy finish for improved glare control in office applications. Class II electrical, IP54_IP20. Complete with 4000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø174 x 94 mm
 Luminaire input power: 27.3 W
 Luminaire luminous flux: 2823 lm
 Luminaire efficacy: 103 lm/W
 Weight: 0.69 kg



TLG_CHAL3_F_150_RMB_IP54.jpg

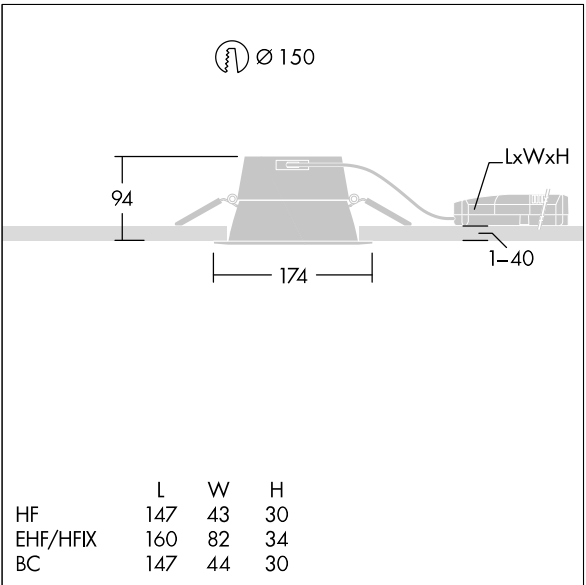

TLG_CHAL3_M_EHF150.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Chalice 3

92989243 CHAL3 150 3000-940 HFIX RMB

THORN