

Chalice 3

THORN

92989424 CHAL3 200 5000-840 HFIX FL RSB

| | | | | | | | | | | |
|------------------------|----------|------|---------|------|--|----|--|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | IP20 | halogen | IK07 | | CE | | 850°C | T _a 25 | |
|------------------------|----------|------|---------|------|--|----|--|-------|-------------------|--|

Chalice 3


A high efficient and sustainable LED downlight for high ceiling application with flood beam (29°) for high ceiling applications. Suitable for mounting in Ø200mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Primary reflector: polycarbonate, glossy finish, faceted. Secondary optic and trim: polycarbonate smooth in satinbrite finish with wide beam. Class II electrical, IP20. Complete with 4000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø223 x 134 mm
 Luminaire input power: 43.7 W
 Luminaire luminous flux: 5541 lm
 Luminaire efficacy: 127 lm/W
 Weight: 1.41 kg



TLG_CHAL3_F_200HC_RSB.jpg

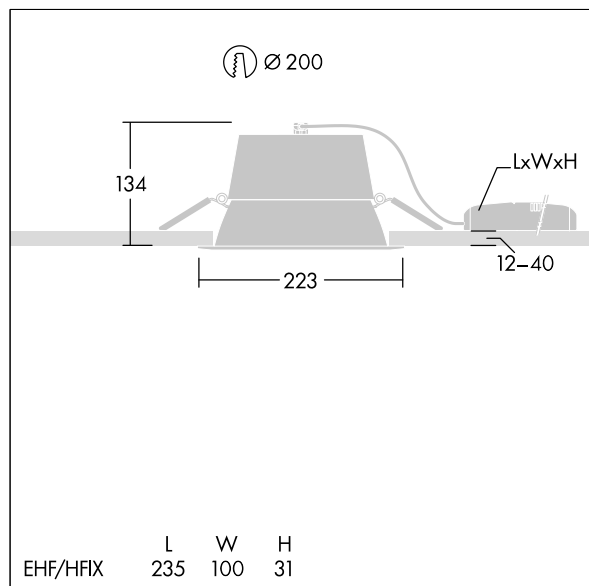

TLG_CHAL3_M_EHF200HC.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Chalice 3

92989424 CHAL3 200 5000-840 HFIX FL RSB

THORN