


# Chalice 3

# THORN

92989424 CHAL3 200 5000-840 HFIX FL RSB



## Chalice 3


A high efficient and sustainable LED downlight for high ceiling application with flood beam (29°) for high ceiling applications. Suitable for mounting in Ø200mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Primary reflector: polycarbonate, glossy finish, faceted. Secondary optic and trim: polycarbonate smooth in satinbrite finish with wide beam. Class II electrical, IP20. Complete with 4000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø223 x 134 mm  
Luminaire input power: 43.7 W  
Luminaire luminous flux: 5541 lm  
Luminaire efficacy: 127 lm/W  
Weight: 1.41 kg



TLG\_CHAL3\_F\_200HC\_RSB.jpg

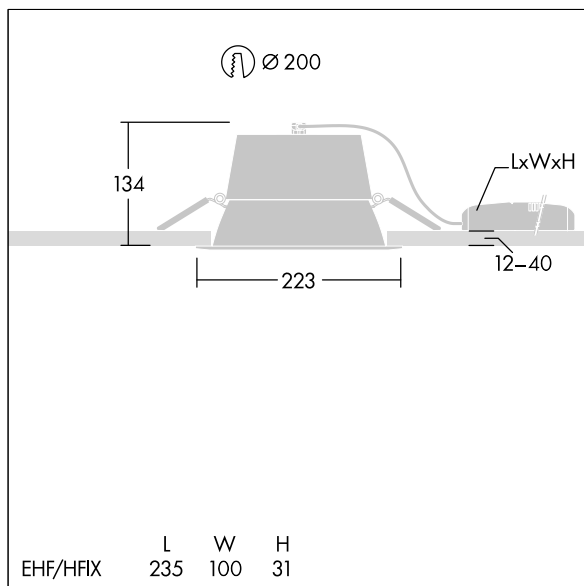

TLG\_CHAL3\_M\_EHF200HC.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Chalice 3

92989424 CHAL3 200 5000-840 HFIX FL RSB

THORN