







HiPak Gen4

THORN

96636470 HIPAK G4 M LED20000-840 WB HFIX QC5

| | | | | | | | | | | | |
|----------|---|------|---|------|---|---|---|---|-------|-------------------|--|
| UK CA |  | IP65 |  | IK08 |  |  |  |  | 850°C | T _a 50 | |
|----------|---|------|---|------|---|---|---|---|-------|-------------------|--|

HiPak Gen4

An IP65 single point suspension LED high bay luminaire with wide beam optic. Electronic, DALI-2 dimmable, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: aluminium. Lens/Diffuser: polycarbonate. Supplied with mounting hook. Equipped with 5 pole Quick Connect socket. Complete with 4000K LED.

ambient temperature: -30°C to +50°C

Dimensions: Ø320 x 170 mm

Luminaire input power: 109.6 W

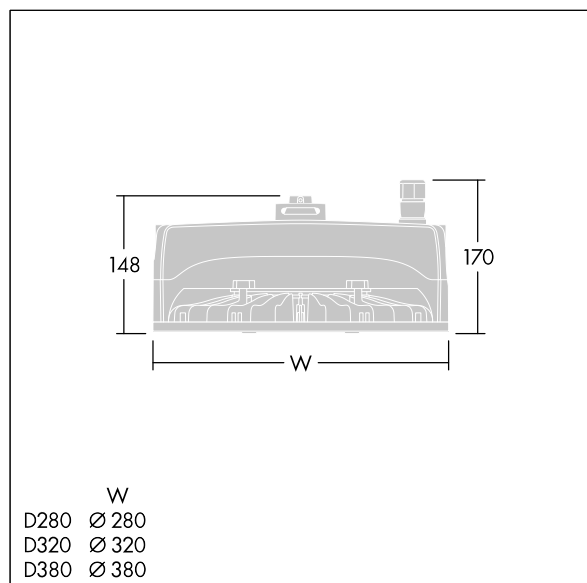
Luminaire luminous flux: 20000 lm

Luminaire efficacy: 182 lm/W

Weight: 4.18 kg



TLG_HIP4_F_NO_STIR_2.jpg



TLG_HIP4_M_ALL.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

HiPak Gen4

96636470 HIPAK G4 M LED20000-840 WB HFIX QC5

THORN