








HiPak Gen4

THORN

96636473 HIPAK G4 L LED35000-840 WB HFIX QC5

UK CA		IP65		IK08					850°C		T _a 50
----------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-----------------------------------------------------------------------------------	-------------------

HiPak Gen4

An IP65 single point suspension LED high bay luminaire with wide beam optic. Electronic, DALI-2 dimmable, for 220-240V, 50/60Hz supply. Class I electrical. IK08. Housing: aluminium. Lens/Diffuser: polycarbonate. Supplied with mounting hook. Equipped with 5 pole Quick Connect socket. Complete with 4000K LED.

ambient temperature: -30°C to +50°C

Dimensions: Ø380 x 170 mm

Luminaire input power: 202.6 W

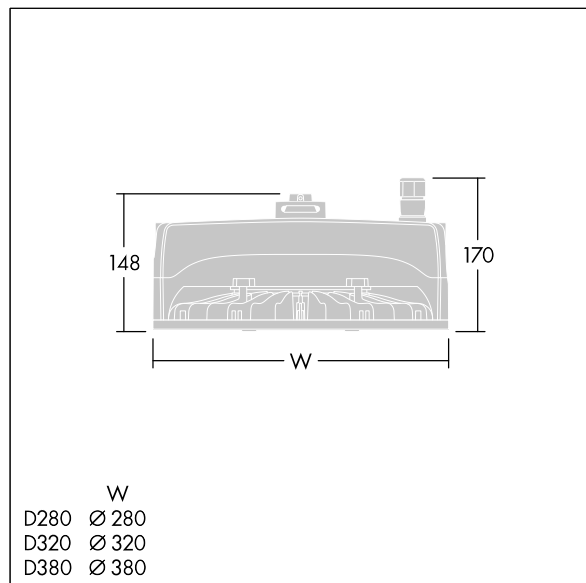
Luminaire luminous flux: 35000 lm

Luminaire efficacy: 173 lm/W

Weight: 5.23 kg



TLG_HIP4_F_NO_STIR_2.jpg



TLG_HIP4_M_ALL.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

HiPak Gen4

96636473 HIPAK G4 L LED35000-840 WB HFIX QC5

THORN