

Voyager One


96636591 VOYAGER ONE P CON ANT ECD WH

THORN


IP20	IK03			T _a -10 +40	
------	------	---	---	---------------------------	--

Voyager One

Slim IP20 LED emergency lighting luminaire; Luminaire for central emergency light supply, for single luminaire monitoring via DALI (DALI-2 certified), settable emergency light level; non-maintained and maintained mode possible; addressing also alternatively possible visually or via EZ-addressing; Cable length from emergency power source to last luminaire: 300 m; additional click-optics optimised for escape routes and open areas from higher mounting heights available; Click in legends for viewing from a maximum distance of 23 m and 30 m available to convert to escape sign luminaire; housing made of polycarbonate white; cover mode of transparent polycarbonate; Tool-less 'click' mounting; zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux; Power supply: 220/240 V AC; Luminaire input power: 4.3 W; IP20; class of protection: SC2; Impact strength: IK03; Dimensions: 336 x 59 x 158 mm; weight: 0.52 kg

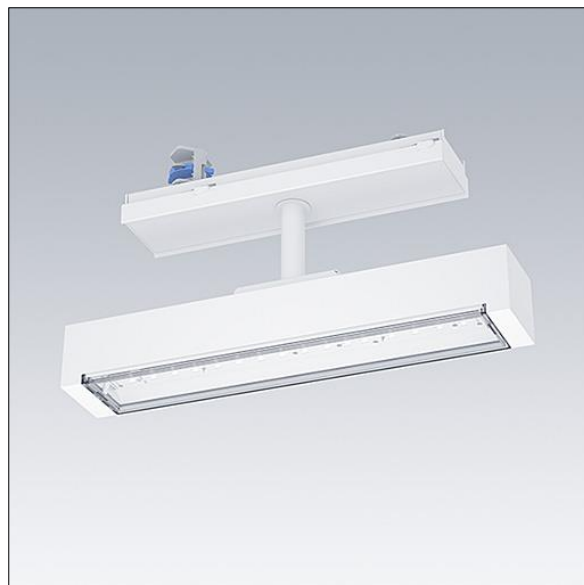

TLG_VOYO_F_CONTUS.jpg

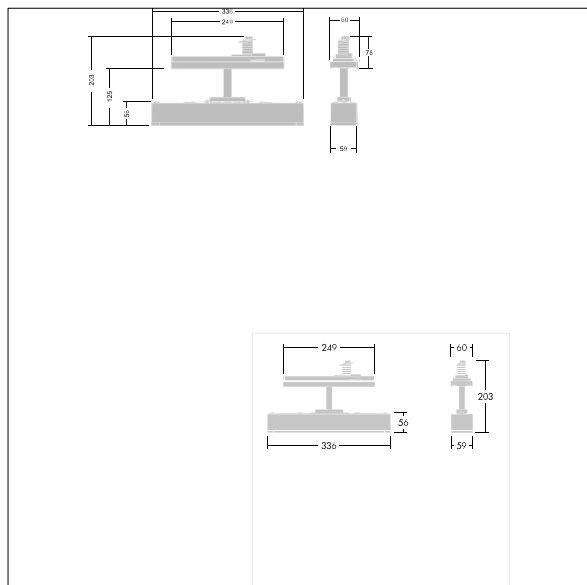

TLG_VOYO_M_CONTUS.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Voyager One

96636591 VOYAGER ONE P CON ANT ECD WH

THORN