

Chalice 3

93901305 CHAL3 200 2000-830 EHF E3D RSB

| | | | | | | | | | | | | |
|---------------------|-------|--|--|--|------|--|--|--|--|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | | | IK09 | | | | | 850°C | T _a 25 | |
|---------------------|-------|--|--|--|------|--|--|--|--|-------|-------------------|--|


Chalice 3

A high efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø200mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver NFC configurable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54_IP20. Complete with 3000K LED

Dimensions: Ø223 x 96 mm
Luminaire input power: 17.5 W
Luminaire luminous flux: 1900 lm
Luminaire efficacy: 109 lm/W
Weight: 1.39 kg



TLG_CHAL3_F_200_RSB_EM.jpg

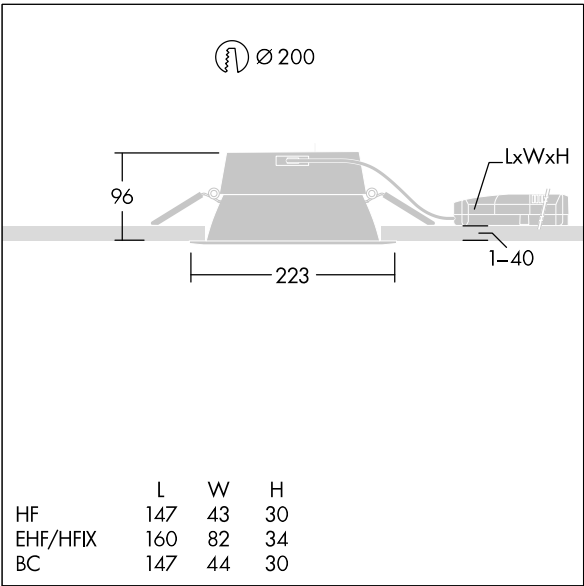

TLG_CHAL3_M_EHF200.wmf