

## Chalice 3

93901363 CHAL3 200 2000-840 EHF E3D RSB

|                     |       |      |         |      |    |       |                   |  |
|---------------------|-------|------|---------|------|----|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | IP20 | halogen | IK09 | CE | 850°C | T <sub>a</sub> 25 |  |
|---------------------|-------|------|---------|------|----|-------|-------------------|--|


### Chalice 3

A high efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø200mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver NFC configurable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical, IP54\_IP20. Complete with 4000K LED

Dimensions: Ø223 x 96 mm  
 Luminaire input power: 17.5 W  
 Luminaire luminous flux: 1990 lm  
 Luminaire efficacy: 114 lm/W  
 Weight: 1.39 kg



TLG\_CHAL3\_F\_200\_RSB\_EM.jpg

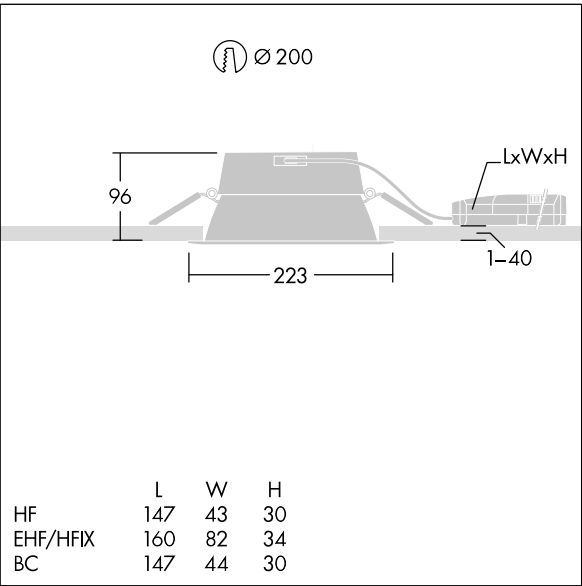

TLG\_CHAL3\_M\_EHF200.wmf

This product contains a light source of energy efficiency class B.

## Chalice 3

93901363 CHAL3 200 2000-840 EHF E3D RSB

THORN