




LED Fit

An ultra lightweight, reliable and efficient alternative to general purpose HID floodlights with best in class optic

- Ultra lightweight, compact design for ease of installation and minimal aesthetic impact
- True asymmetric optic provides light distribution and excellent light control (0cd at 90°) with no need to tilt
- Maintenance free for 50 000 hours lifetime
- Reduce energy consumption by approximately 80% compared to similar HIT solutions



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

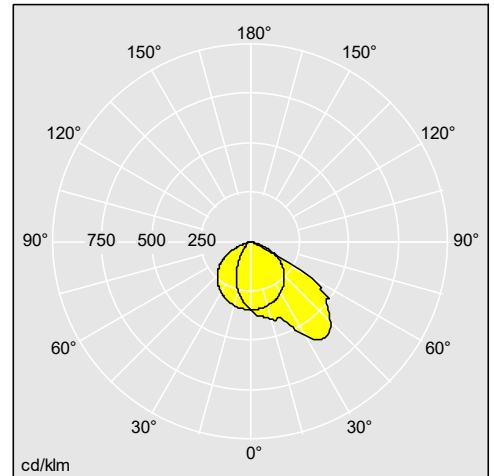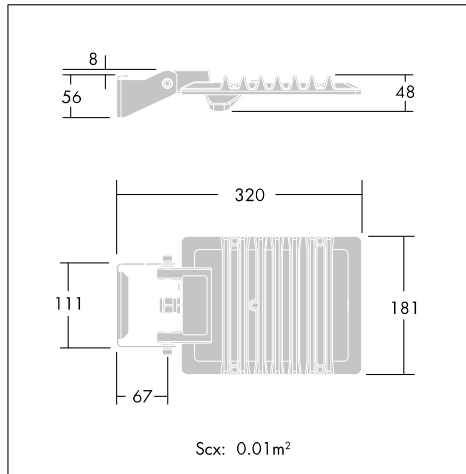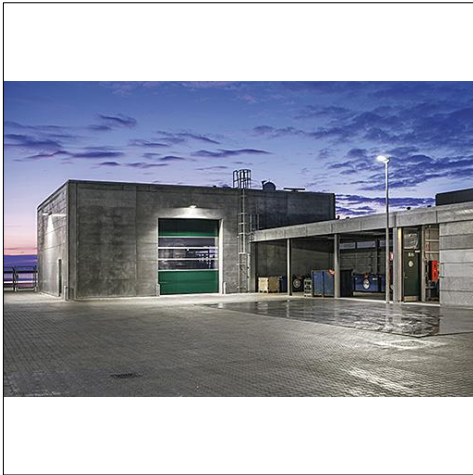

96628333

Material/Finish

Body : die-cast aluminium light grey 150 sanded textured (close to RAL9006)

Stirrup : aluminium
(EN AC-46000)

Visor : polycarbonate with external surface powder coated RAL 9006 (light grey)

Standard corrosion class: C3

Installation/Mounting

Pre-wired with 60cm cable.

Stirrup can be fixed via three fixation points - one M10 and two M8 - and is reversible allowing different mounting positions.

LED Fit

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
LED Fit					
LEDFIT S 45W A/S CL1 L840	LED		1,7	96628332	E7767095
LEDFIT M 90W A/S CL1 L840	LED		3	96628333	E7767096
LEDFIT S 45W A/S CL1 L830	LED		1,7	96633103	
LEDFIT M 90W A/S CL1 L830	LED		3	96633104	