



## Chalice 74

**The IP65 and fire-rated downlight completes our Chalice range with a smaller size for demanding environments**

- IP65 from below for installation in moist environments like bathrooms
- Tool-free and flexible installation with completely detachable connector box
- Exchangeable lens and bezel for customisation on site



*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

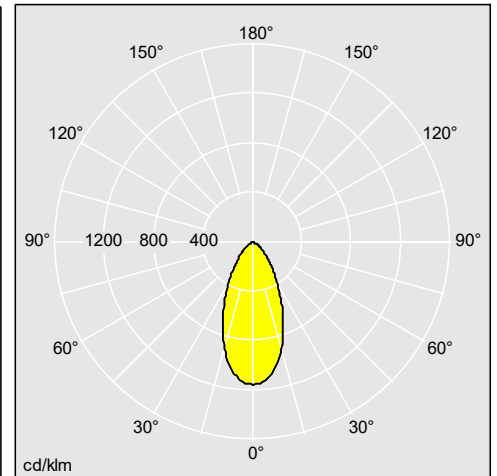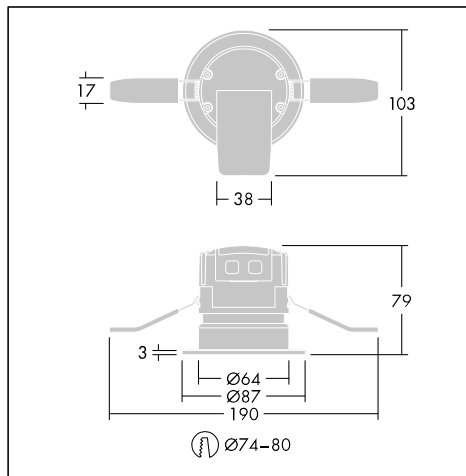

96631506

### Material/Finish

Housing/body material: steel with aluminium heatsink covered with a PC cap

Lens material: PMMA

Bezel material: die-cast aluminium

Bezel finish: matt white, gloss white, matt black, chrome, brushed aluminium

### Installation/Mounting

Chalice 74 can be installed directly from the box into a wide range of ceiling types including thicknesses from 1mm – 25mm.

Equipped with a detachable connector which allows an easy and toolfree pre-wiring via push-fit terminal block.

# Chalice 74

## Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
<b>Chalice 74</b>					
CHAL 74 LED900-830 WFL IP65 WHM	LED		0,4	96631505	
CHAL 74 LED900-840 WFL IP65 WHM	LED		0,4	96631506	
CHAL 74 LED550-830 WFL IP65 WHM	LED		0,3	96631503	
CHAL 74 LED550-840 WFL IP65 WHM	LED		0,3	96631504	
<b>Chalice 74 attachments</b>					
CHAL 74 TRIM WHM			0,04	96631507	
CHAL 74 TRIM CR			0,04	96631508	
CHAL 74 TRIM AL			0,04	96631509	
CHAL 74 TRIM WH			0,04	96631510	
CHAL 74 TRIM BKM			0,04	96631511	
CHAL 74 LENS WFL			0,02	96631513	
CHAL 74 LENS WW			0,02	96631515	
CHAL 74 LENS FL			0,02	96631516	