



Diffusalux

Curved profile linear luminaire with opal diffuser for surface mounting

- Curved opal diffuser in tough polycarbonate for specific light control
- Lumen output switch (LOS) for individual control of wattage/lumen output
- Lockable polycarbonate end caps
- Sealed up to IP40



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

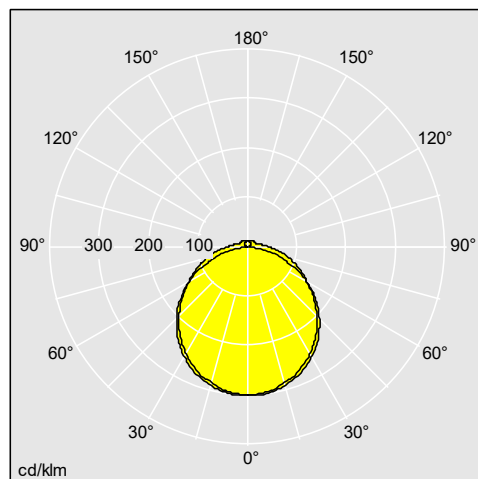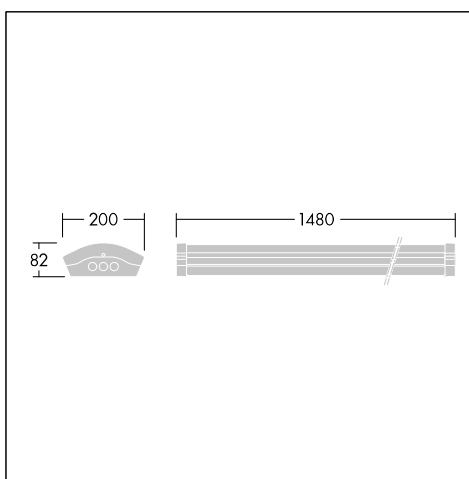

96633566

Material/Finish

Body: white painted steel
End caps: polycarbonate
Diffuser: opal polycarbonate extrusion

Installation/Mounting

Cable entry in the centre of the back spine (Ø21,5mm).
Standard BESA fixings
Piano key terminal block for easy installation.

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
Diffusalux					
DIFF 3 5000-840 HF L1500 LOS	LED		2,7	96633566	
DIFF 3 5000-840 HF E3 L1500 LOS	LED		2,9	96633567	
DIFF 3 5000-840 HF MWS L1500 LOS	LED		2,75	96633568	
DIFF 3 5000-840 HF E3 MWS L1500 LOS	LED		2,95	96633569	
DIFF 3 5000-840 HFIX L1500 LOS	LED		2,7	96633570	
DIFF 3 5000-840 HFIX E3 L1500 LOS	LED		2,9	96633571	