


## Omega Moduline

**A sustainable LED panel utilising replaceable modular linear LED light source and driver for office and education applications.**

- The key feature of OMEGA MODULINE is the ability to replace LED modules, drivers & sensors making it an upgradeable, more environmentally friendly option with prolonged lifetime with careful maintenance.
- Each complete linear LED module can be easily replaced tool-free and offers a simple click-in mechanism, this allows a change of LED modules at end of life or the change of colour temperature or colour rendering if desired.
- A combination of deep cells with primary lenses provide high quality lighting with even light distribution and efficient glare control at very high brightness of the LED modules.
- Available in sizes 600 x 600 mm, 625 x 625 mm, 1200 x 300 mm in different lumen packages (3300, 4100, 4800 lumen), colour temperatures of 3000 K, 4000 K and VCT 2700 K...6500 K and options of CRI 80 and CRI 90.
- The design allows the clean integration of sensors, controls and emergency options into the front of the panel with all components neatly stored within a gear tray on the back of the panel.

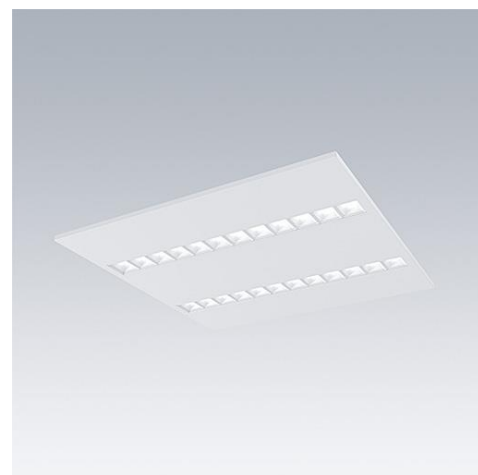

*Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.*

### Material/Finish

Frame: mild sheet steel, white (RAL9016).

LED module: Moulded plastic, white.

Optical system: Plastic lens.

### Installation/Mounting

Suitable for recessed lay in grid ceilings as standard and when combined with additional accessories will allow installation in concealed ceilings, surface-mounted and suspended. All accessories need to be ordered separately.

Each complete linear LED module can be easily replaced tool-free and offers a simple click-in mechanism.

### Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
<b>Omega Moduline</b>					
OMEGA M 4100-840 HF WHG Q600	LED		2,519	96636364	
OMEGA M 4100-840 HF WHG Q625	LED		2,651	96636366	
OMEGA M 4100-840 HF WHG 3X12	LED		1,631	96636367	
OMEGA M 3300-840 HF WHG Q600	LED		2,52	96636385	
OMEGA M 3300-840 HF WHG Q625	LED		2,651	96636387	
OMEGA M 3300-840 HF WHG 3X12	LED		1,631	96636389	
OMEGA M 4800-840 HF WHG Q600	LED		2,52	96636391	
OMEGA M 4800-840 HF WHG Q625	LED		2,651	96636393	
OMEGA M 4800-840 HF WHG 3X12	LED		1,631	96636395	
<b>Omega Moduline Dimmable</b>					
OMEGA M 4100-840 HFIX WHG Q600	LED		2,645	96636365	
OMEGA M 4100-840 HFIX WHG Q625	LED		2,776	96636383	
OMEGA M 4100-840 HFIX WHG 3X12	LED		2,756	96636384	
OMEGA M 3300-840 HFIX WHG Q600	LED		2,645	96636386	
OMEGA M 3300-840 HFIX WHG Q625	LED		2,776	96636388	
OMEGA M 3300-840 HFIX WHG 3X12	LED		2,756	96636390	
OMEGA M 4800-840 HFIX WHG Q600	LED		2,645	96636392	

## Omega Moduline

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
OMEGA M 4800-840 HFIX WHG Q625	LED		2,776	96636394	
OMEGA M 4800-840 HFIX WHG 3X12	LED		2,756	96636396	
OMEGA M 4800-940 HFIX WHG Q600	LED		2,645	96636529	
OMEGA M 4800-940 HFIX WHG 3X12	LED		2,756	96636534	
OMEGA M 3300-927-65 BC WHG Q600	LED		2,607	96636536	
<b>Omega Moduline Accessories</b>					
OP2 PLASTERBOARD MTG KIT 3X12			2,21	96633195	
OP2 SUSPENSION KIT 1500 MSW			0,3	96633197	
OP2 HIDDEN CEILING KIT CLICK IN 6x6			0,22	96633198	
OP2 SAFETY WIRE KIT MRG			0,015	96633199	
OP2 CONCEALED CEILING MTG KIT PULL UP			0,38	96633271	
BETA 3 SURFACE MOUNT KIT 3X12			2,5	96635034	
BETA 3 IQ BEAM SURFACE MOUNT KIT Q600			1,9	96635031	
BETA 3 IQ BEAM SURFACE MOUNT KIT Q625			2	96635033	
<b>Omega Moduline Spare Parts</b>					
LEM OMEGA M 830 WHG			0,096	59013457	
LEM OMEGA M 840 WHG			0,096	59013458	
LEM OMEGA M 940 WHG			0,096	59013459	
LEM OMEGA M 930 WHG			0,096	59013460	
LEM OMEGA M VCT WHG			0,096	59013461	
LEM OMEGA M 840 SRG			0,096	59013462	
LEM OMEGA M 830 SRG			0,096	59013463	