Emergency Lighting Luminaires

59011003 <Voyager Style 150 Ballast ECP

Emergency Lighting Luminaires

Replacement control gear for {Foldername Level 3} 150 ECP central battery emergency luminaire with single luminaire monitoring via Powerline on the eBox system, settable emergency light level (96632903, 96632904); addressing also alternatively possible visually or via EZ-addressing; Non-maintained and maintained mode possible; max. line length from emergency power source to last luminaire: 300 m; {Weight}

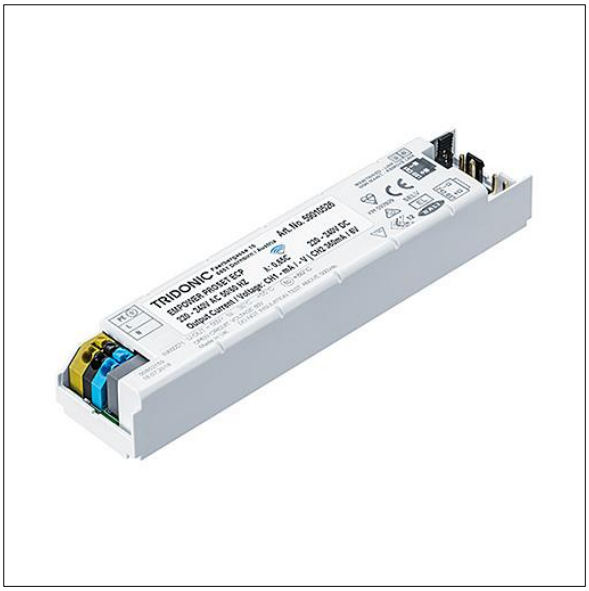

ZS_RES_F_ECP_1.jpg

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting