



Equaline

Equaline's flexible and modular system lets you create the right solution to fit any space

- Rectangular shape provides a functional profile without dominating the architecture
- Easy recessed installation into plasterboard and modular ceilings as well as simple suspended and surface mounted installation, even in and on the wall
- Equaline keeps things simple for electricians and contractors due to its undemanding setup
- Powder coated aluminium body brings high quality elegant look
- Cover in opal (PM) for diffuse and LRO for norm compliant (UGR<19) lighting
- Non-dimmable (HF) and DALI dimmable (HFIX)
- Emergency lighting with a 3 hours self-contained battery
- To build up your Equaline system please use the configurator by clicking on "go to myProduct Equaline"



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

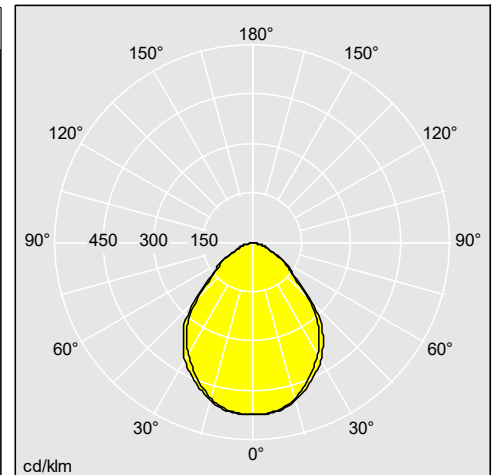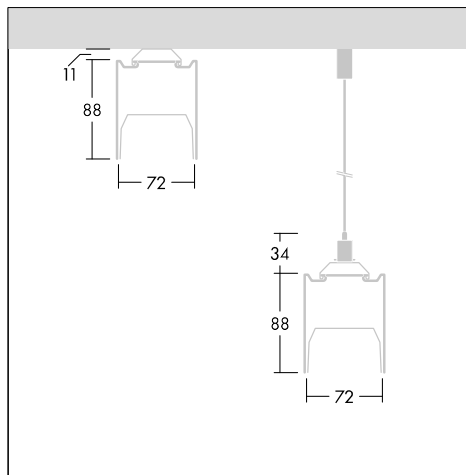

Material/Finish

Body: extruded aluminium with powder coated finish
 Cover: opal (PM) / LRO
 End-cap: aluminium with powder coated finish

Installation/Mounting

Suitable for recessed, surface or suspended mounting. Optional installation kits are needed for recessed installation, springs for surface mounted installation or a suspension kit for suspended installation. Electrical feed in from the back of the luminaire with terminal block on LED-batten. Electrical connection between the LED-battens is done via simple connection with the through wiring set and the mechanical connection with metal connector inside the channel. Possible arrangement in lines as well with corners in L, U and square shapes with opal (PM) cover, LRO only in linear lines.

Equaline

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
Equaline Channel, frameless					
EQL C L1000 PM SRE	LED		2,1	96631993	
EQL C L1250 PM SRE	LED		2,6	96631994	
EQL C L1500 PM SRE	LED		3,2	96631995	
EQL C L1750 PM SRE	LED		3,7	96631996	
EQL C L2000 PM SRE	LED		4,2	96631997	
EQL C L3000 PM SRE	LED		6,3	96631998	
EQL C L1000 LRO SRE	LED		2,1	96631999	
EQL C L1250 LRO SRE	LED		2,6	96632000	
EQL C L1500 LRO SRE	LED		3,2	96632001	
EQL C L1750 LRO SRE	LED		3,7	96632002	
EQL C L2000 LRO SRE	LED		4,2	96632003	
EQL C L3000 LRO SRE	LED		6,3	96632004	
EQL C L1000 PM WH	LED		2,1	96632023	
EQL C L1250 PM WH	LED		2,6	96632024	
EQL C L1500 PM WH	LED		3,2	96632025	
EQL C L1750 PM WH	LED		3,7	96632026	
EQL C L2000 PM WH	LED		4,2	96632027	
EQL C L3000 PM WH	LED		6,3	96632028	
EQL C L1000 LRO WH	LED		2,1	96632029	
EQL C L1250 LRO WH	LED		2,6	96632030	
EQL C L1500 LRO WH	LED		3,2	96632031	
EQL C L1750 LRO WH	LED		3,7	96632032	
EQL C L2000 LRO WH	LED		4,2	96632033	
EQL C L3000 LRO WH	LED		6,3	96632034	
Equaline Channel, frameless, corner					
EQL CL C L541 PM SRE			2,2	96631961	
EQL CL C L541 PM WH			2,2	96631963	
EQL CL C L791 PM SRE			3,2	96633615	
EQL CL C L791 PM WH			3,2	96633616	
Equaline Channel, standard frame					
EQL C L600 PM WH F	LED		1,3	96632005	
EQL C L1200 PM WH F	LED		2,5	96632006	
EQL C L1800 PM WH F	LED		3,8	96632007	
EQL C L1800 LRO WH F	LED		3,8	96632008	
EQL C L1000 PM WH F	LED		2,1	96632009	
EQL C L1250 PM WH F	LED		2,6	96632010	
EQL C L1500 PM WH F	LED		3,2	96632011	
EQL C L1750 PM WH F	LED		3,7	96632012	
EQL C L2000 PM WH F	LED		4,2	96632013	
EQL C L3000 PM WH F	LED		6,3	96632014	
EQL C L600 LRO WH F	LED		1,3	96632015	
EQL C L1200 LRO WH F	LED		2,5	96632016	
EQL C L1000 LRO WH F	LED		2,1	96632017	
EQL C L1250 LRO WH F	LED		2,6	96632018	

Equaline

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
EQL C L1500 LRO WH F	LED		3,2	96632019	
EQL C L1750 LRO WH F	LED		3,7	96632020	
EQL C L2000 LRO WH F	LED		4,2	96632021	
EQL C L3000 LRO WH F	LED		6,3	96632022	
Equaline Channel, standard frame, corner					
EQL CL C L553 PM WH F			2,2	96631962	
EQL CL C L803 PM WH F			3,2	96633619	
Equaline Channel, slim frame					
EQL C L1000 PM SRE FS	LED		2,1	96632035	
EQL C L1250 PM SRE FS	LED		2,6	96632036	
EQL C L1500 PM SRE FS	LED		3,2	96632037	
EQL C L1750 PM SRE FS	LED		3,7	96632038	
EQL C L2000 PM SRE FS	LED		4,2	96632039	
EQL C L3000 PM SRE FS	LED		6,3	96632040	
EQL C L1000 LRO SRE FS	LED		2,1	96632041	
EQL C L1250 LRO SRE FS	LED		2,6	96632042	
EQL C L1500 LRO SRE FS	LED		3,2	96632043	
EQL C L1750 LRO SRE FS	LED		3,7	96632044	
EQL C L2000 LRO SRE FS	LED		4,2	96632045	
EQL C L3000 LRO SRE FS	LED		6,3	96632046	
EQL C L1000 PM WH FS	LED		2,1	96632047	
EQL C L1250 PM WH FS	LED		2,6	96632048	
EQL C L1500 PM WH FS	LED		3,2	96632049	
EQL C L1750 PM WH FS	LED		3,7	96632050	
EQL C L2000 PM WH FS	LED		4,2	96632051	
EQL C L3000 PM WH FS	LED		6,3	96632052	
EQL C L1000 LRO WH FS	LED		2,1	96632053	
EQL C L1250 LRO WH FS	LED		2,6	96632054	
EQL C L1500 LRO WH FS	LED		3,2	96632055	
EQL C L1750 LRO WH FS	LED		3,7	96632056	
EQL C L2000 LRO WH FS	LED		4,2	96632057	
EQL C L3000 LRO WH FS	LED		6,3	96632058	
Equaline Channel, slim frame, corner					
EQL CL C L546 PM SRE FS			2,2	96631958	
EQL CL C L546 PM WH FS			2,2	96631959	
EQL CL C L796 PM SRE FS			3,2	96633617	
EQL CL C L796 PM WH FS			3,2	96633618	
Equaline Batten					
EQL B 840 HF L1000			1,2	96631944	
EQL B 840 HF L1250			1,5	96631945	
EQL B 840 HF L1500			1,7	96631946	
EQL B 840 HF L1750			2	96631947	
EQL B 840 HF L2000			2,2	96631948	
EQL B 830 HF L1000			1,2	96631949	
EQL B 830 HF L1250			1,5	96631950	

Equaline

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
EQL B 830 HF L1500			1,7	96631951	
EQL B 830 HF L1750			2	96631952	
EQL B 830 HF L2000			2,2	96631953	
EQL B 830 HF L2000 HO			2	96634933	
EQL B 840 HF L1000 HO			1,1	96634924	
EQL B 840 HF L1250 HO			1,325	96634925	
EQL B 840 HF L1500 HO			1,55	96634926	
EQL B 840 HF L1750 HO			1,775	96634927	
EQL B 840 HF L2000 HO			2	96634928	
EQL B 830 HF L1000 HO			1,1	96634929	
EQL B 830 HF L1250 HO			1,325	96634930	
EQL B 830 HF L1500 HO			1,55	96634931	
EQL B 830 HF L1750 HO			1,775	96634932	
Equaline Batten, corner					
EQL CL B 840 HF L527x527			1,2	96631956	
EQL CL B 830 HF L527x527			1,2	96631957	
EQL CL B 830 HF L527X527 HO			1,37	96634937	
EQL CL B 840 HF L527X527 HO			1,37	96634936	
Equaline Batten, dimmable					
EQL B 840 HFIX L600			0,8	96631930	
EQL B 840 HFIX L1200			1,4	96631931	
EQL B 840 HFIX L1000			1,2	96631932	
EQL B 840 HFIX L1250			1,5	96631933	
EQL B 840 HFIX L1500			1,7	96631934	
EQL B 840 HFIX L1750			2	96631935	
EQL B 840 HFIX L2000			2,2	96631936	
EQL B 830 HFIX L600			0,8	96631937	
EQL B 830 HFIX L1200			1,4	96631938	
EQL B 830 HFIX L1000			1,2	96631939	
EQL B 830 HFIX L1250			1,5	96631940	
EQL B 830 HFIX L1500			1,7	96631941	
EQL B 830 HFIX L1750			2	96631942	
EQL B 830 HFIX L2000			2,2	96631943	
EQL B 927-65 HFIX L1000			1,15	96633574	
EQL B 927-65 HFIX L1250			1,375	96633575	
EQL B 927-65 HFIX L1500			1,6	96633576	
EQL B 927-65 HFIX L1750			1,825	96633577	
EQL B 927-65 HFIX L2000			2,05	96633578	
EQL B 840 HFIX L600 HO			0,74	96634910	
EQL B 830 HFIX L1200 HO			1,28	96634918	
EQL B 840 HFIX L1200 HO			1,28	96634911	
EQL B 840 HFIX L1000 HO			1,1	96634912	
EQL B 840 HFIX L1250 HO			1,325	96634913	
EQL B 840 HFIX L1500 HO			1,55	96634914	
EQL B 840 HFIX L1750 HO			1,775	96634915	
EQL B 840 HFIX L2000 HO			2	96634916	

Equaline

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
EQL B 830 HFIX L600 HO			0,74	96634917	
EQL B 830 HFIX L1000 HO			1,1	96634919	
EQL B 830 HFIX L1250 HO			1,325	96634920	
EQL B 830 HFIX L1500 HO			1,55	96634921	
EQL B 830 HFIX L1750 HO			1,775	96634922	
EQL B 830 HFIX L2000 HO			2	96634923	
Equaline Batten, dimmable, corner					
EQL CL B 840 HFIX L527x527			1,2	96631954	
EQL CL B 830 HFIX L527x527			1,2	96631955	
EQL CL B 927-65 HFIX L777X777			1,69	96633579	
EQL CL B 830 HFIX L527X527 HO			1,37	96634935	
EQL CL B 840 HFIX L527X527 HO			1,37	96634934	
Equaline Batten, dimmable, emergency					
EQL B 830 HFIX L1500 E3D			2,2	96631964	
EQL B 840 HFIX L1500 E3D			2,2	96631966	
Equaline Accessories					
EQL EC SET WH L9			0,27	96632059	
EQL F EC SET WH L9			0,27	96632060	
EQL EC SET SRE L9			0,24	96632061	
EQL FS EC SET WH L9			0,24	96632063	
EQL FS EC SET SRE L9			0,24	96632064	
EQL EC SET WH L20			0,24	96632065	
EQL F EC SET WH L20			0,27	96632066	
EQL EC SET SRE L20			0,24	96632067	
EQL FS EC SET WH L20			0,24	96632069	
EQL FS EC SET SRE L20			0,24	96632070	
EQL CON SET			0,23	96632071	
EQL COV PM 1000			0,28	96632072	
EQL COV LRO 1000			0,5	96632073	
SLOIN slim/EQL/SLOT1/SLOT2 DV Kit			0,2	22169873	
Equaline Installation accessories, recessed plasterboard and modular					
EQL MOUNT NIV PB SET			0,35	96631968	
EQL MOD VTB BRACKET SET			0,35	96631969	
EQL MOD HTB BRACKET SD 600 SET			0,7	96631972	
EQL MOD HTB BRACKET SD 1200 SET			1,4	96631973	
EQL MOD HTB BRACKET FRNT SET			0,3	96631974	
SLN2/SLOIN/EQL MOUNT NIV PB SET			0,34	22169303	
Equaline Installation accessories, surface and suspended					
EQL WALL MOUNTING TOOL			0,3	96631971	
SLN2/SLOIN/SLOT2/EQL ASI1 WH E-L			-0,1	22156788	
SLN2/SLOIN/SLOT2/EQL ASI2 WH E-L			-0,2	22156789	
SLN2/SLOIN/SLOT2/EQL ASI2 SR E-L			-0,2	22157369	
SLN2/SLOIN/SLOIN slim/EQL mount disc SET			0,002	22169965	

Equaline

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
SLN2/SLOIN/EQL WALL BRACKET SRE			0,157	22170338	
SLN2/SLOIN/SLOT2 EQL ASI1 SR E-L			0,1	22157368	
SLN2/SLOIN/EQL WALL BRACKET WH			0,157	22171124	
TECTON/CONTUS/SLN2/SLOIN/SLOT2/EQL A			0,2	22169175	
TEC/CONT/SLN2/SLOIN/EQL/CHAL3 ASI1 O-L			0,07	22169178	
TEC/CONT/SLN2/SLOIN/EQL/CHAL3 ASI2 O-L			0,8	22169179	