


Omega Pro 2

92913222 OP2 3800-840 CKIT+ HX Q600

THORN

| | | | | | | | | | | |
|---------------------------|---|---|---|---|---|---|---|-------|-------------------------|--|
| IEC EN 60598-1 RG 0 |  |  |  |  |  |  |  | 650°C | T _a 0 +35 | |
|---------------------------|---|---|---|---|---|---|---|-------|-------------------------|--|


Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, DALI-2 dimmable. Class II electrical,
IP40_IP20, Impact strength: IK03. Body: sheet steel,
finished white (close to RAL9016). Diffuser: UV-stabilised
polycarbonate hexagonal comfort optic with central control
pod hole. Electrical connection via 7 pole piano key
terminals, loop-in/loop-out possible. Complete with 4000K
LED, Colour Rendering Index min.: 80

Dimensions: 597 x 597 x 57 mm
Luminaire input power: 27.4 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 139 lm/W
Weight: 5.35 kg



TLG_OMP2_F_QHKIT_PDB.jpg

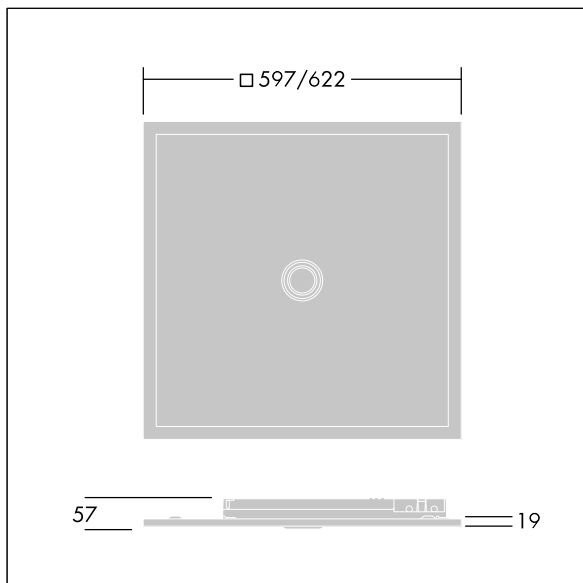

TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting