

# Omega Pro 2

92913456 OP2 3000-840 OP HF E3 Q600


THORN

|                           |   |   |      |   |   |   |        |
|---------------------------|---|---|------|---|---|---|--------|
| IEC EN<br>60598-1<br>RG 0 |  |  | IK03 |  |  |  | 650 °C |
|---------------------------|---|---|------|---|---|---|--------|

## Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, with 3 hour, manual test, emergency lighting circuit. Class II electrical, IP44\_IP20, Impact strength: IK03.  
Body: sheet steel, finished white (close to RAL9016).  
Diffuser: UV-stabilised polymethylmethacrylate opal optic for wide light distribution. Electrical connection via piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Dimensions: 597 x 597 x 55 mm  
Luminaire input power: 24.4 W  
Luminaire luminous flux: 2850 lm  
Luminaire efficacy: 117 lm/W  
Weight: 5.56 kg

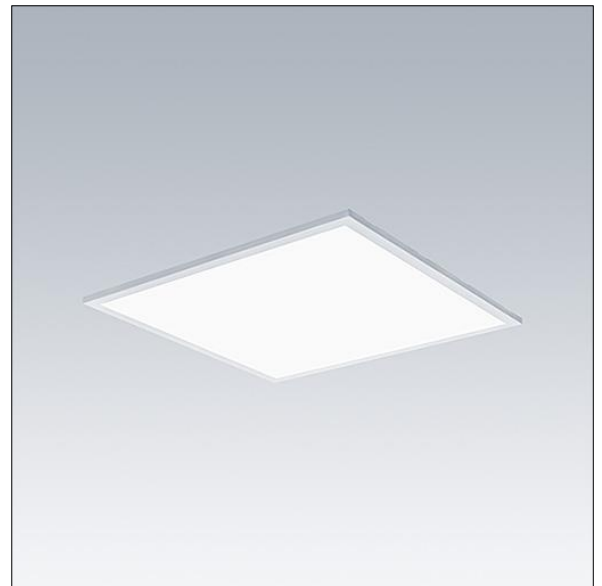

TLG\_OMP2\_F\_QO\_PDB.jpg



TLG\_OMP2\_M\_Q.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting