

## 92945458 IS S 24L70-730 NR M CLO BP3550 ZU CL2 ->

ISO 9223 C5			IP66	IK08					650°C	T <sub>a</sub> -35 +45
----------------	--	--	------	------	--	--	--	--	-------	---------------------------


### Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, set for constant light output, driving 24 LEDs at 700mA. Body: small size, die-cast aluminium (EN AC-44300), powder coated textured light grey 150 (close to RAL9006). Shaft: light grey 150 (close to RAL9006). Cover: Extra White glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70, Correlated colour temperature\*: 3000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, T<sub>a</sub> max.: 45°C. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt. Pre-wired with 8m, 1.5mm<sup>2</sup> H07RN-F cable. Fitted with LED optic lining. BPxyz: Autonomous bi-power reduction (x: hours before midnight, y: hours after midnight, zz: reduction (%)) equipped with Zhaga socket up.

Dimensions: 550 x 238 x 157 mm  
Luminaire input power: 51.5 W  
Luminaire luminous flux: 7730 lm  
Luminaire efficacy: 150 lm/W  
Weight: 4.54 kg  
Scx: 0.041 m<sup>2</sup>



TLG\_ISLC\_F\_S\_ZU\_SR.jpg

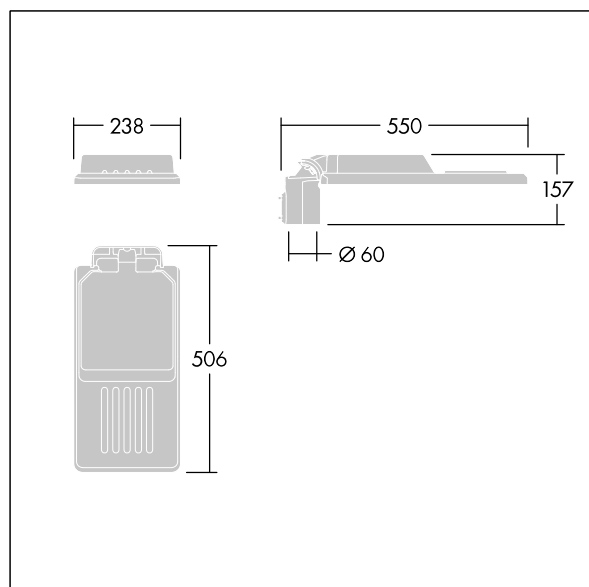

TLG\_ISLC\_M\_SMTP60.wmf

This product contains a light source of energy efficiency class D.

**Isaro**

**THORN**

**92945458 IS S 24L70-730 NR M CLO BP3550 ZU CL2 ->**