


Omega Moduline

THORN

96636536 OMEGA M 3300-927-65 BC WHG Q600




Omega Moduline

A sustainable LED panel utilising replaceable modular linear LED light sources and driver for office and education applications. Each complete LED module can be easily replaced tool-free and offers a simple click-in mechanism, this allows a change of LED modules at end of life or the change of colour temperature or colour rendering if desired. A combination of deep cells with primary lenses provides high quality lighting with even light distribution and efficient glare control at very high brightness of the LED modules. Electronic, DALI-2 dimmable. Class II electrical, IP20, Impact strength: IK03. Body: white. LED module reflector finished in white. Suitable for recessed lay in grid ceilings as standard and when combined with additional accessories will allow installation in concealed ceilings, plasterboard ceilings, surface-mounted and suspended. All accessories need to be ordered separately. Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless Rated median useful life: L90 50000 h at 25 °C. Colour Rendering Index min.: 90 Complete with 2700-6500K LEDs.



TLG_OMGM_F_600X600.jpg

Dimensions: 597 x 597 x 33 mm
Luminaire input power: 26.6 W
Luminaire luminous flux: 2850 lm
Luminaire efficacy: 107 lm/W
Weight: 2.61 kg

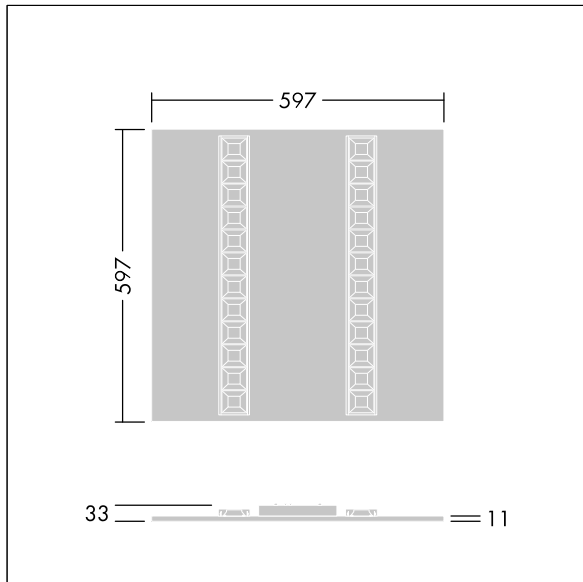

TLG_OMGM_M_600X600.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting