


GTLED Pro

Light that lasts - for any tunnel

- Designed for long lasting performance suitable with the highest corrosion classification (C5) and no debris retention design
- Unique luminaire design : slim, compact and lightweight
- Wide range of optics providing uniform and comfortable lighting for the safety of tunnel users
- Versatile solution with choice of luminaire sizes, remote gear boxes and fixation brackets



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

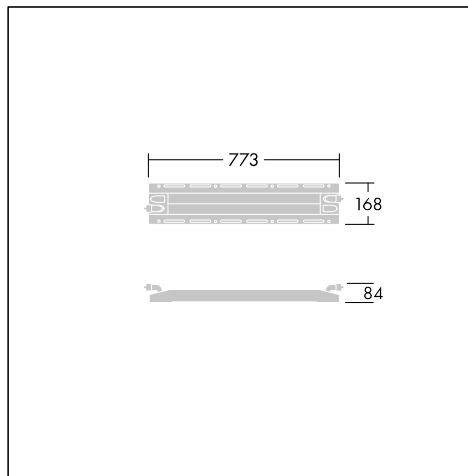

Material/Finish

Body: size S; die-cast aluminium (EN AC-44300). Size MS/M/L/XL; extruded aluminium (6060 T6) and end cap in die-cast aluminium (EN AC-44300)
 Enclosure: 4mm toughened glass
 External screws: A2 with zinc coating treatment
 Glass holder: 316L stainless steel with zinc coating treatment
 Finish: powder coated white, RAL9016 gloss 30%
 Standard corrosion class C5 according to ISO 9223: 2012.

Gearbox GRP: glass fibre reinforced polyester

Bracket: 316L stainless steel

Wire: H07ZZ-F

Gearbox AL: aluminium (EN AC-44300), powder coated.

Installation/Mounting

Luminaire mounting: ceiling or wall with specific brackets (to be ordered separately)

Gear box: pre-wired, 1.5m cable, with bracket included.

GTLED Pro

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
GTLED Pro, small					
GP AL S 12L-740 ASC IN CL1			3,21	96276232	
GP AL S 24L-740 ASC IN CL1			3,289	96276233	
GP AL S 36L-740 ASC IN CL1			3,343	96276234	
GP AL S 48L-740 ASC IN CL1			3,397	96276235	
GTLED Pro, medium small					
GP AL MS 48L-740 NR-A IN CL1			6,49	96668966	
GP AL MS 36L-740 NR-A IN CL1			6,43	96668964	
GP AL MS 24L-740 NR-A IN CL1			6,37	96668962	
GP AL MS 12L-740 NR-A IN CL1			6,31	96668960	
GTLED Pro, medium					
GP AL M 72L-740 ASC IN CL1 1050mA			10	96276619	
GP AL M 72L-740 ASC IN CL1 <=850MA			10	96633299	
GP AL M 108L-740 ASC IN CL1 <=850mA			10,31	96669655	
GTLED Pro, large					
GP AL L 144L-740 ASC IN CL1			12,21	96276374	
GTLED Pro, extra large					
GP AL XL 216L-740 ASC IN CL1 <=500MA			17,23	96276381	
GP AL XL 216L-740 ASC IN CL1 >=700MA			17,23	96670019	
GTLED Pro accessories					
GP MS/M/L/XL LADDER BRACKET (x1 PAIR)			0,6	96635273	
GP S LADDER BRACKET (x1 PAIR)			1	96635274	
GP MS/M/L/XL ADJ BRACKET +/- 45° (PAIR)			1,13	96669609	